

CARACTÉRISTIQUES TECHNIQUES

- Charge max
- Portée max
- Charge max. en bout de flèche

Mode chariot

Mode relevage

8 000 kg




8 000 kg



58,5 m


65 m


1 900 kg

1 700 kg

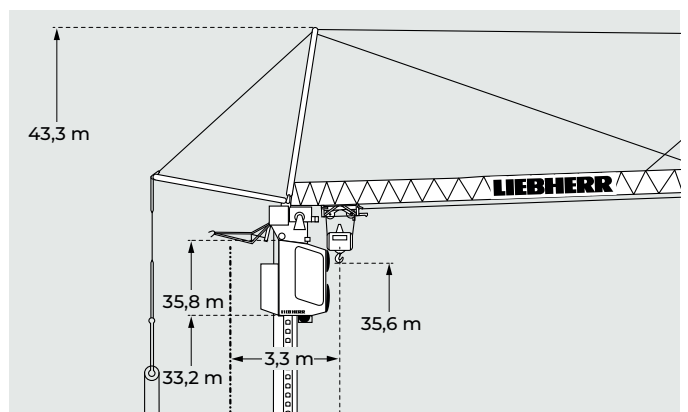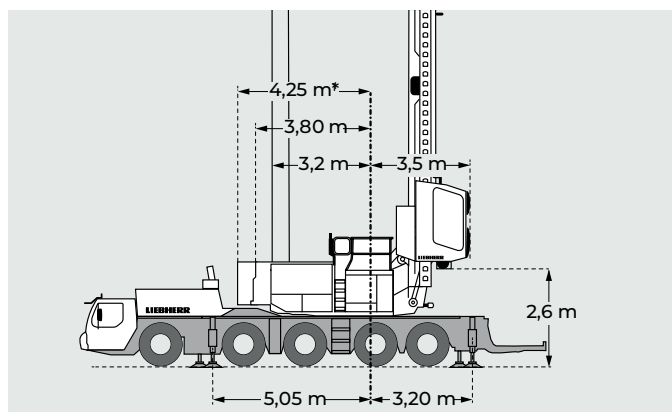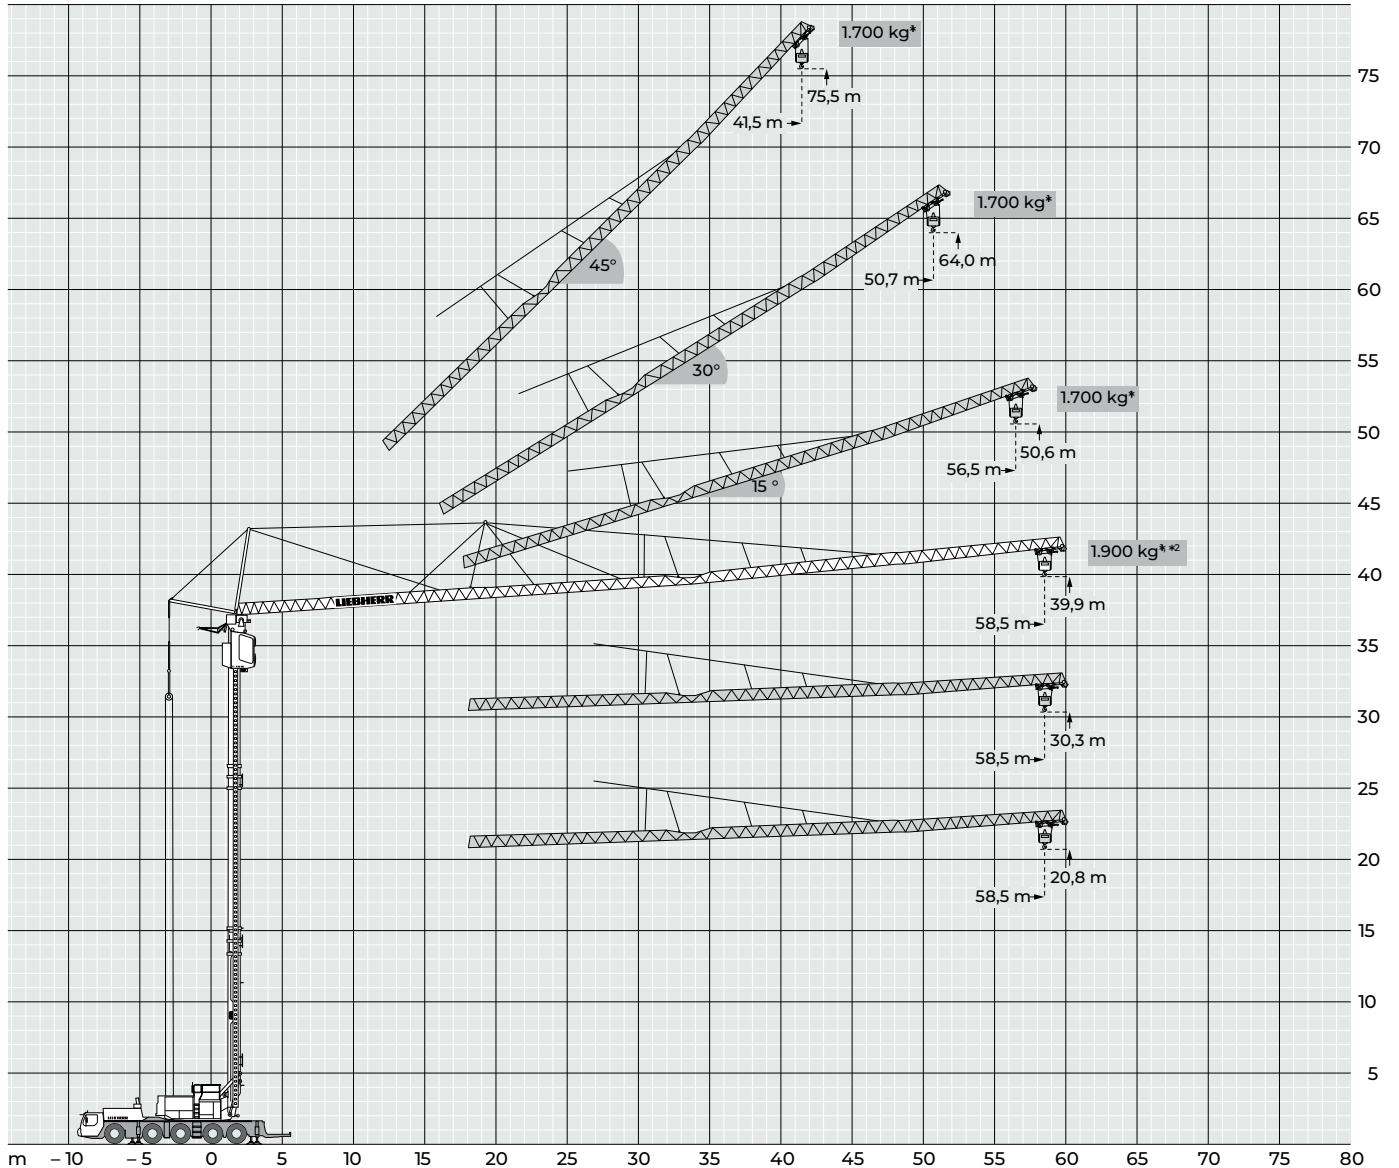

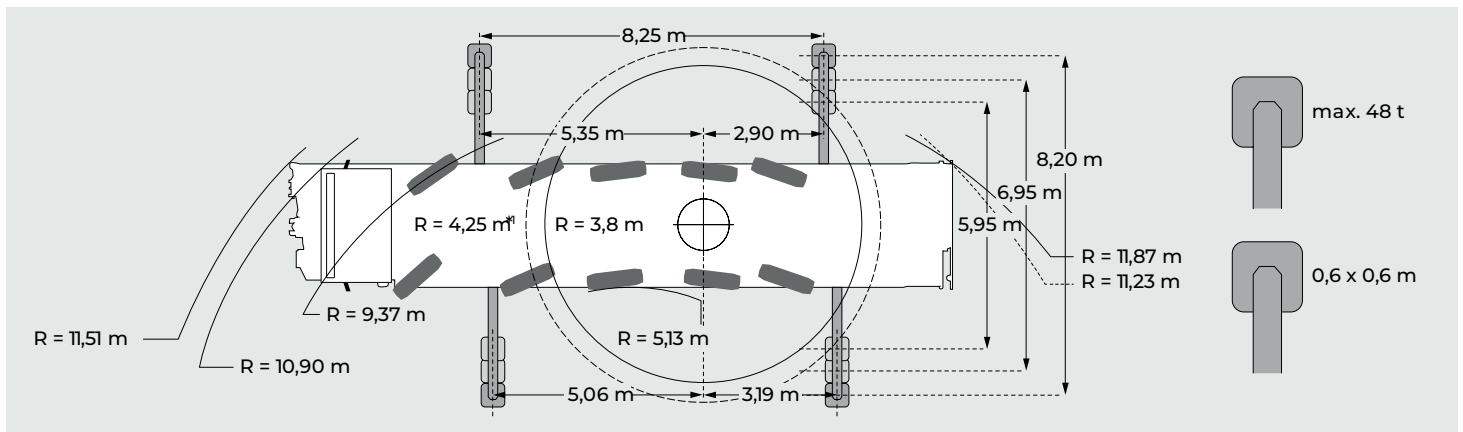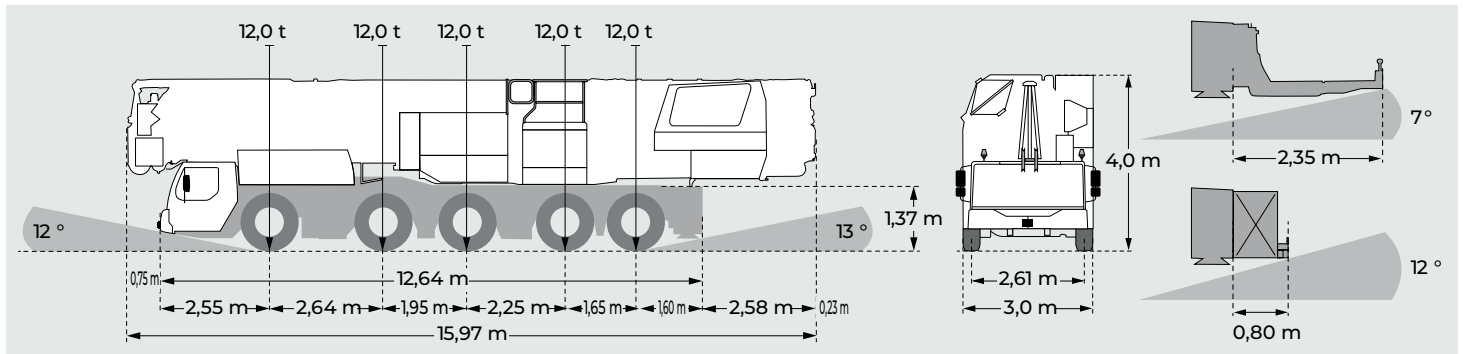

			m																					
α°	m	kg	3,0	6,0	9,0	12,0	15,0	18,0	21,0	24,0	27,0	30,0	33,0	36,0	39,0	42,0	45,0	48,0	51,0	54,0	57,0	58,5		
0°	58,5		3,3 - 13,4	8000	8000		7110	5880	4990	4320	3800	3380	3040	2760	2520	2310	2130	1970	1830	1710	1600	1550		
			3,3 - 11,5	8000	8000		7660	6090	5030	4270	3700	3250	2890	2590	2350	2140	1960	1800	1660	1540	1440	1340	1300	
	Plus*		3,2 - 14,4	8000	8000		7670	6340	5390	4680	4120	3670	3300	3000	2740	2510	2320	2150	2000	1870	1750	1700		
15°	56,5		3,2 - 50,0	1800	1800															1750			1630	1550
			3,0 - 42,0	1800	1800													1650	1530	1420	1320	1250		
30°	50,7		3,0 - 16,0	6000	6000			5280	4460	3840	3370	2990	2680	2420	2200	2010	1850	1710	1600					
			2,7 - 14,0	6000	6000			5550	4510	3790	3250	2830	2500	2230	2000	1820	1650	1510	1390	1300				
45°	41,5		2,7 - 39,0	1800	1800													1700						
			2,7 - 36,0	1800	1800													1620		1500				

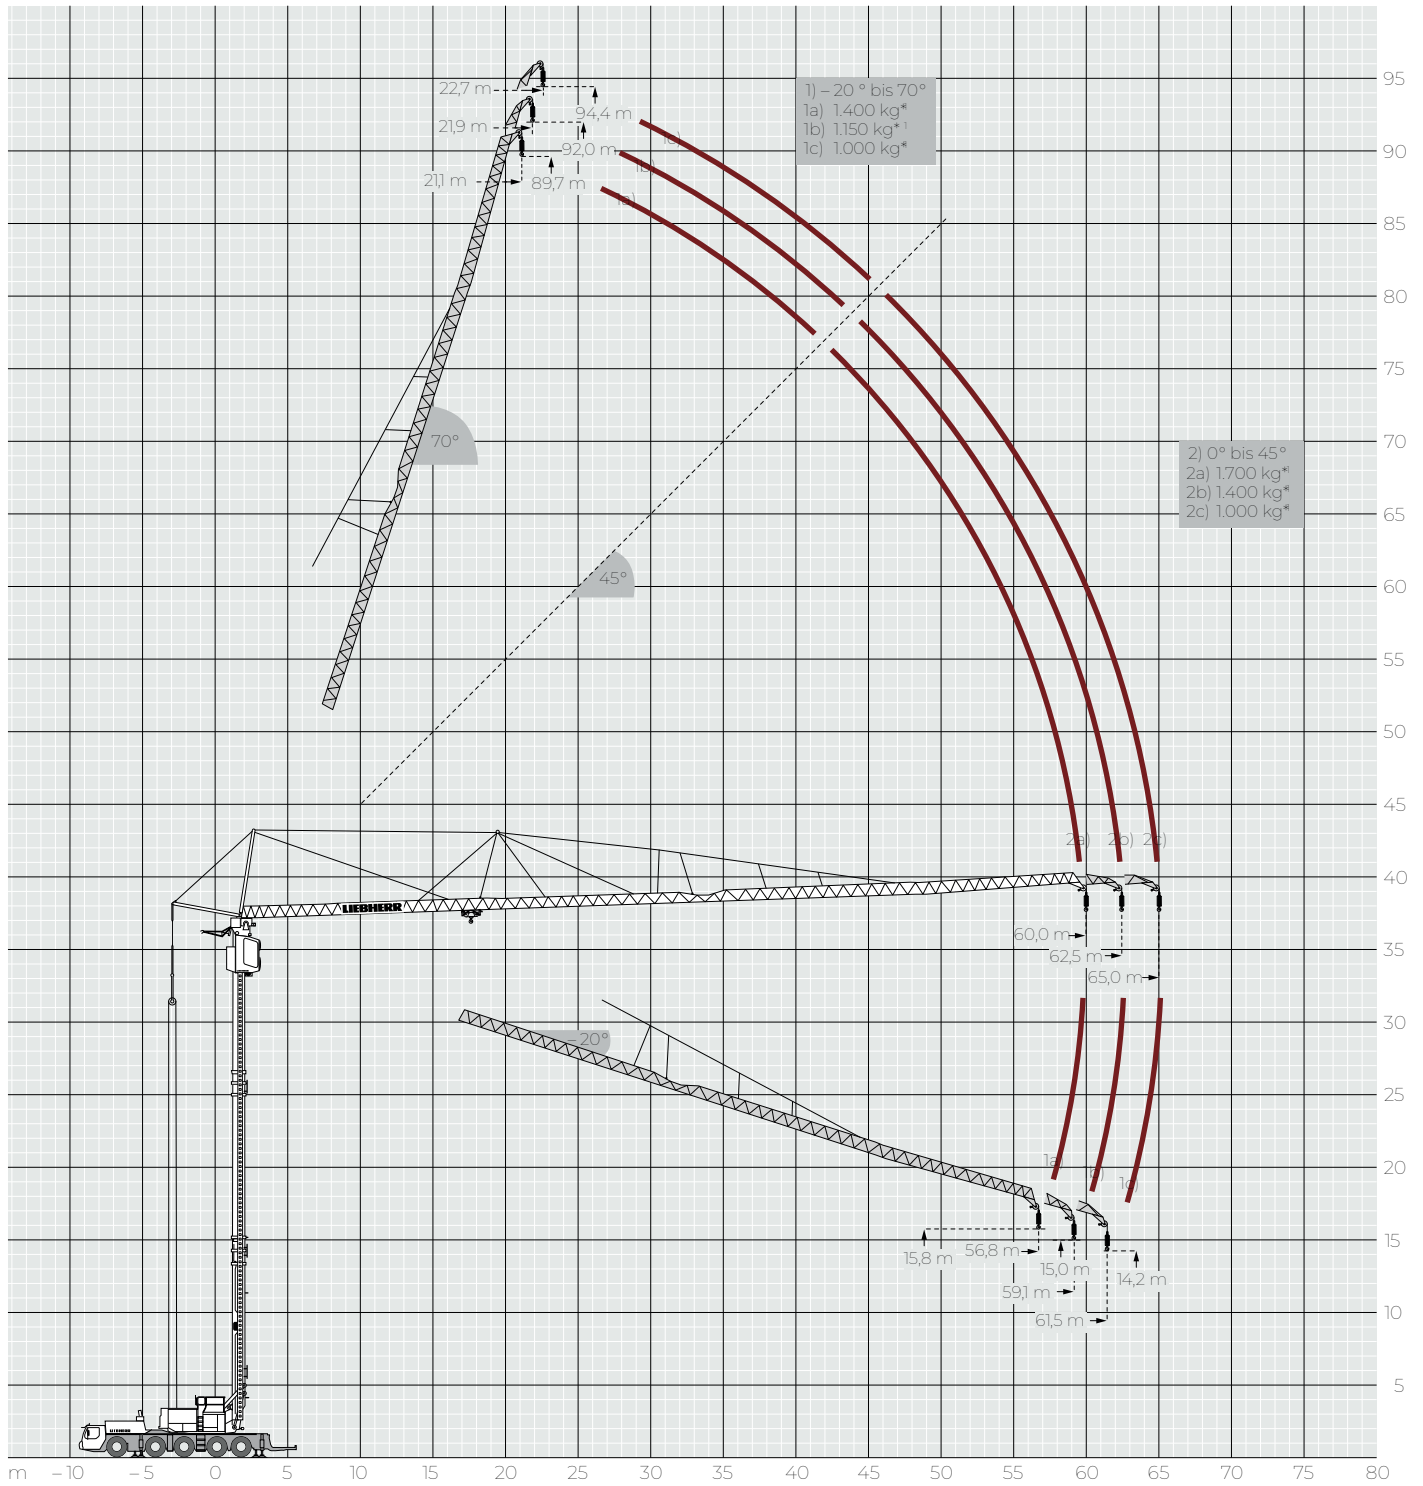


MK140




		70° 21,1 m	45° 43,0 m	0° 60,0 m	- 20° 56,8 m
		550	800	550	
+3 t		800	1150	800	
+6 t		1150	1400	1150	
+9 t		1400	1700	1400	

→ kg



		70° 21,9 m	45° 44,7 m	0° 62,5 m	- 20° 59,1 m
		300	650	300	
+3 t		650	800	650	
+6 t		800	1150	800	
+9 t		1150	1400	1150	

→ kg



		70° 22,7 m	45° 46,5 m	0° 65,0 m	- 20° 61,5 m
		300			
+3 t		550			
+6 t		800			
+9 t		1000			

→ kg